

FLOODED HIGH TEMPERATURE BATTERY

55861HT (12V58Ah)



CHARACTERISTICS



| Item | Specifications |
|--------------------------------|--------------------------|
| Nominal Voltage | 12V |
| Nominal Capacity (20HR) | 58Ah |
| Reserve Capacity | 94min |
| Cold Cranking Amps@0°F (-18°C) | 540A |
| Length | 242mm(9.53inches) |
| Dimension | Width 175mm(6.89inches) |
| | Height 175mm(6.89inches) |
| Approx Weight | 14.9kg(32.8lbs) |
| Terminal | 1 |
| Cell layout | 0 |
| Hold-Down | B13 |
| Case | Black-PP Material |
| Cover | Black-PP Material |
| Handle | TS2 |

APPLICATIONS

- Car start
- EV/HEV
- Engine start

GENERAL FEATURES

- Design for high temperature countries and regions
- Superior life in high temperature environment
- High tin alloy and thicker positive grid
- High-temp paste
- Patented venting system bring less water loss and prevent acid leakage

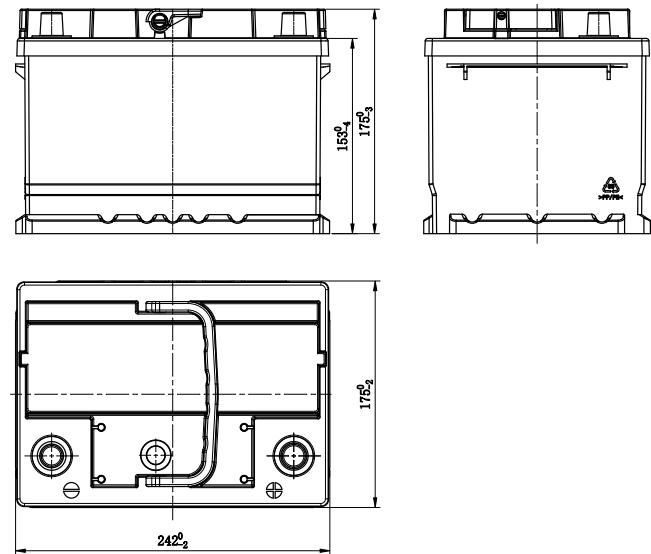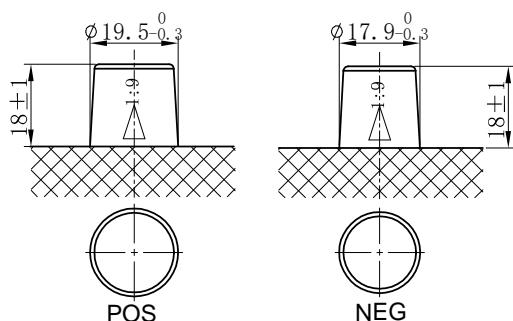

*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.

www.leoch.com

Leoch Batteries Pte Ltd

www.leoch.sg

Leoch Battery Corporation

www.leochamericas.com

Leoch Europe S.A.

www.leoch.eu