

MAINTENANCE-FREE MOTORCYCLE BATTERY


HPGU1R-4-P (12V25Ah)















GENERAL FEATURES

- Maintenance-free
- · Sealed and non-spillable AGM battery
- · Shipped pre-charged and ready to install

CHARACTERISTICS

Item		Specifications
Nominal Voltage		12V
Nominal Capacity (1	0HR)	25Ah
Cold Cranking Perfo	rmance Amps@0°F (-1	8°C) 320A
Dimension (±2mm)	Length	195mm (7.68inches)
	Width	125mm (4.92inches)
	Container Height	156mm (6.14inches)
	Total Height	176mm (6.93inches)
Battery (with acid)	Approx Weight	8.34kg (18.4lbs)
Terminal type		G
Battery type	Factory Activated Se	eries
Full Charge	Constant-Voltage Charge:	
	Initial charging curre	nt Less than 0.3C ₁₀
	Voltage 14.40V~15.00V at 25°C (77°F)	
	Charging time	15~18h
	Constant-Current Ch	narge:
	Charging current 0.1C ₁₀ , when charging voltage up to 14.40V, continue to charge 4h	
Floating Charge	Initial charging curre	nt Unlimited
	Voltage	13.50V~13.80V at 25°C (77°F)
Capacity affected by Temperature	40°C (104°F)	106%
	25°C (77°F)	100%
	0°C (32°F)	86%
	-15°C (5°F)	65%

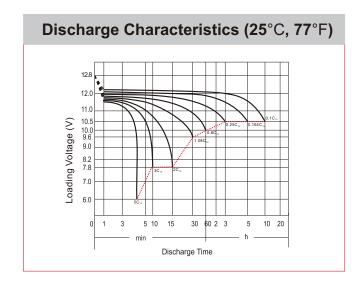

Leoch International Technology Ltd.

mww.leoch.com

Leoch Batteries Pte Ltd

www.leoch.sg

Leoch Battery Corporation

@ www.leochamericas.com

Leoch Europe S.A.



^{*}Values are subject to variation of +/- 5% in normal manufacturing processes.