
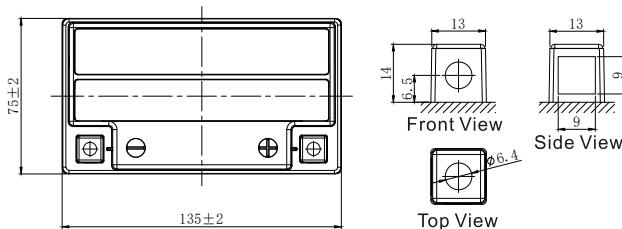


MAINTENANCE-FREE MOTORCYCLE BATTERY

EB8-3-2(J) (12V6.5Ah)

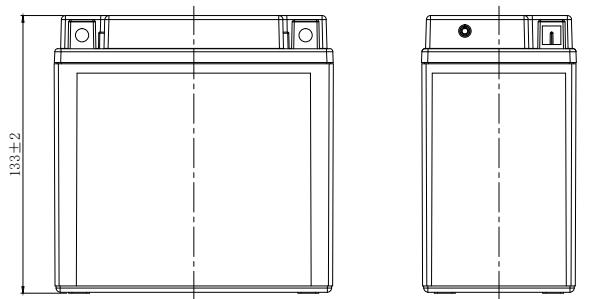


GENERAL FEATURES

- Maintenance-free
- Sealed and non-spillable AGM battery
- Shipped pre-charged and ready to install

CHARACTERISTICS

Item	Specifications
Nominal Voltage	12V
Nominal Capacity (10HR)	6.5Ah
Cold Cranking Performance Amps@0°F (-18°C)	65A
Dimension (±2mm)	<p>Length 135mm (5.31inches)</p> <p>Width 75mm (2.95inches)</p> <p>Container Height 133mm (5.24inches)</p> <p>Total Height 133mm (5.24inches)</p>
Battery (with acid)	Approx Weight 2.38kg (5.24lbs)
Terminal type	A
Battery type	Factory Activated Series
Constant-Voltage Charge:	
Initial charging current Less than 0.3C ₁₀	
Full Charge	<p>Voltage 14.40V~15.00V at 25°C (77°F)</p> <p>Charging time 15~18h</p>
Constant-Current Charge:	
Charging current 0.1C ₁₀ , when charging voltage up to 14.40V, continue to charge 4h	
Floating Charge	<p>Initial charging current Unlimited</p> <p>Voltage 13.50V~13.80V at 25°C (77°F)</p>
40°C (104°F) 106%	
Capacity affected by Temperature	<p>25°C (77°F) 100%</p> <p>0°C (32°F) 86%</p> <p>-15°C (5°F) 65%</p>

Discharge Characteristics (25°C, 77°F)

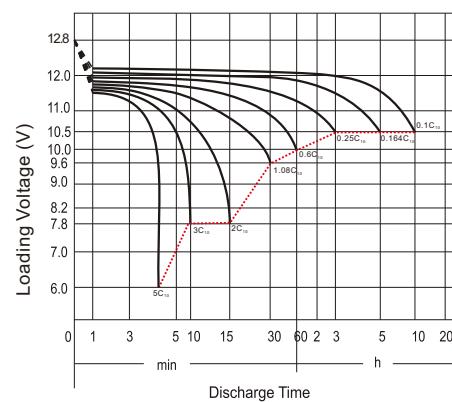

*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.

www.leoch.com

Leoch Batteries Pte Ltd

www.leoch.sg

Leoch Battery Corporation

www.leochamericas.com

Leoch Europe S.A.

www.leoch.eu